


Reducing Tee

NO. 25 Grooved Branch
NO. 29T Threaded Branch
 (Ductile Iron#)

For Complete Information
 Request Publication **07.01**

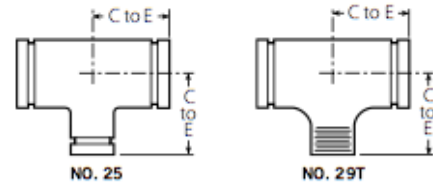

Size	No. 25 Std.	No. 29T w/ Thd. Branch	Approx. Weight Each
Nominal Size Inches mm	C to E Inches mm	C to E Inches mm	Lbs. kg
1 25 × 1 25 × 3/4 20	+	+	1.0 0.5
1 1/4 32 × 1 1/4 32 × 1 25	+	+	1.3 0.6
1 1/2 40 × 1 1/2 40 × 3/4 20	+	+	1.5 0.7
	1 25	+	1.5 0.7
	1 1/4 32	+	1.7 0.8
2 50 × 2 50 × 3/4 20	3.25 83	3.25 83	2.5 1.1
	1 25	3.25 83	2.7 1.2
	1 1/4 32	+	1.8 0.8
	1 1/2 40	3.25 83	3.0 1.4
2 1/2 65 × 2 1/2 65 × 3/4 20	+	+	3.9 1.8
	1 25	3.75 95	3.8 1.7
	1 1/4 32	+	4.2 1.7
	1 1/2 40	3.75 95	3.9 1.8
	2 50	3.75 95	4.5 2.0
	2 1/2 65	3.75 95	4.5 2.0
3 80 × 3 80 × 3/4 20	+	+	5.7 2.6
	1 25	4.25 108	6.1 2.8
	1 1/4 32	+	8.0 3.6
	1 1/2 40	4.25 108	6.5 2.9
	2 50	4.25 108	6.2 2.8
	2 1/2 65	4.25 108	6.4 2.9
	3 80	4.25 108	6.4 2.9
	3 80	4.25 108	6.4 2.9
4 100 × 4 100 × 3/4 20	+	+	8.0 3.6
	1 25	5.00 127	7.8 3.5
	1 1/4 32	+	9.6 4.4
	1 1/2 40	5.00 127	10.2 4.6
	2 50	5.00 127	11.2 5.1
	2 1/2 65	5.00 127	11.4 5.2
	3 80	5.00 127	11.6 5.3
	3 80	5.00 127	11.6 5.3
	3 80	5.00 127	11.6 5.3
	3 80	5.00 127	11.6 5.3

Size	No. 25 Std.	No. 29T w/ Thd. Branch	Approx. Weight Each	
Nominal Size Inches mm	C to E Inches mm	C to E Inches mm	Lbs. kg	
5 125 × 5 125 × 1 25	+	+	14.0 6.4	
	1 1/2 40	+	14.3 6.5	
	2 50	5.50 (sw) 140	5.50 (sw) 140	14.5 6.6
	2 1/2 65	5.50 140	5.50 (sw) 140	15.2 6.9
	3 80	5.50 140	5.50 (sw) 140	16.6 7.5
	4 100	5.50 140	5.50 (sw) 140	16.7 7.6
	5 125	5.50 140	5.50 (sw) 140	16.7 7.6
6 150 × 6 150 × 1 25	+	+	23.0 10.4	
	1 1/2 40	+	24.0 10.9	
	2 50	6.50 165	6.50 165	21.6 9.8
	2 1/2 65	6.50 165	6.50 165	21.4 11.7
	3 80	6.50 165	6.50 165	26.5 12.0
	4 100	6.50 165	6.50 165	25.0 11.3
6 1/2 165.1 × 6 1/2 165.1 × 3 80	6.50 165	6.50 (sw) 165	24.0 10.9	
	4 100	6.50 165	6.50 (sw) 165	25.0 11.3
	5 125	6.50 165	6.50 165	23.2 10.5
	6 150	6.50 165	6.50 165	23.2 10.5
	6 1/2 165.1	6.50 165	6.50 (sw) 165	24.0 10.9
8 200 × 8 200 × 1 1/2 40	+	+	33.0 15.0	
	2 50	7.75 (sw) 197	7.75 (sw) 197	33.5 15.2
	2 1/2 65	+	+	39.0 17.7
	3 80	7.75 (sw) 197	7.75 (sw) 197	33.6 15.2
	4 100	7.75 197	7.75 197	41.8 19.0
	5 125	7.75 (sw) 197	7.75 (sw) 197	34.0 15.4
	6 150	7.75 197	7.75 197	42.3 19.2
	6 1/2 165.1	7.75 (sw) 197	7.75 (sw) 197	48.0 21.8
	6 1/2 165.1	7.75 (sw) 197	7.75 (sw) 197	48.0 21.8
	6 1/2 165.1	7.75 (sw) 197	7.75 (sw) 197	48.0 21.8

TABLE CONTINUED ON PG. 2-8

14 – 24
350 – 600



See AGS Roll Groove Fittings, pg. 5-2;
 for 14–24"/350–600mm Cut Groove
 Systems Request Publication 07.01

+ Contact Victaulic for details.

Ductile iron except those that are marked (sw), which are segmentally welded steel.

IMPORTANT NOTE:

No. 29T Threaded Outlet Reducing Tees are supplied NPT and are available with British Standard threads. For British Standard specify "BSP" clearly on order.